



FLAT FACED

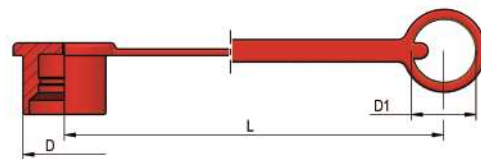

Norm: ISO 16028
Materiaal: staal
Finish: Zn-Fe (CR 3)
Standaard Seals: NBR
Temperatuur bereik: -25°C + 100°C
Optionele seals: FKM, FFKM, EPDM, etc
Werkdruk: 250 - 300 bar
Onderdruk koppelen: nee

BG	draad	WD bar	code	vrouwdeel	Ø mm	L mm	code	mandeel	Ø mm	L mm
1	1/4 BSP	300	90001503	FFC04-04FBF 300 bar	28	58,5	90001502	FFP04-04FBF 300 bar	16,2	52
2	3/8 BSP	250	90001510	FFC06-06FBF 250 bar	32	67,3	90001505	FFP06-06FBF 250 bar	19,76	63,5
2	1/2 BSP	250	90001535	FFC06-08FBF 250 bar	32	72,3	90001530	FFP06-08FBF 250 bar	19,76	67,5
3	1/2 BSP	250	90001554	FFC08-08FBF 250 bar	38	78,5	90001549	FFP08-08FBF 250 bar	24,55	72,5
3	3/4 BSP	250	90001555	FFC08-12FBF 250 bar	38	84	90001550	FFP08-12FBF 250 bar	24,55	74,5
4	3/4 BSP	250	90001576	FFC12-12FBF 250 bar	48	93,6	90001571	FFP12-12FBF 250 bar	29,95	86
4	1 BSP	250	90001575	FFC12-16FBF 250 bar	48	93,6	90001570	FFP12-16FBF 250 bar	29,95	86
5	1-1/4 BSP	250	o.a.	FFC16-20FBF 250 bar	55	109,3	o.a.	FFP16-20FBF 250 bar	36	90
6	1-1/4 BSP	250	o.a.	FFC20-20FBF 250 bar	75	112,5	o.a.	FFC20-20FBF 250 bar	44	105
7	1-1/2 BSP	250	o.a.	FFC24-24FBF 250 bar	79	118,3	o.a.	FFP24-24FBF 250 bar	57,05	119,5
8	2 BSP	250	o.a.	FFC32-32FBF 250 bar	103	147,4	o.a.	FFC32-32FBF 250 bar	72,9	173

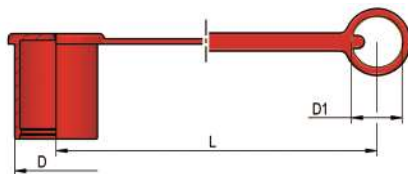

7

Stofkappen/pluggen

BG	code	stofplug	Ø mm	L mm	code	stofkap	Ø mm	L mm
1	90001592	FFC04-DP	32,5	200	90001591	FFP04-DC	26	200
2	90001600	FFC06-DP	37	200	90001595	FFP06-DC	27,5	200
3	90001610	FFC08-DP	43	200	90001605	FFP08-DC	35	200
4	90001614	FFC12-DP	53,5	265	90001612	FFP12-DC	43	265
5	90001616	FFC16-DP	63	280	90001618	FFP16-DC	50	280



Uitwisselbaar met: DNP PLT1, Stucchi firg

FLAT FACED



Norm: ISO 16028 / 350 BAR
Materiaal: staal
Finish: Zn-Fe (CR 3)
Standaard Seals: NBR
Temperatuur bereik: -25°C + 100°C
Optionele seals: FKM, FFKM, EPDM, etc
Werkdruk: 350 - 500 bar
Onderdruk koppelen: nee

BG	draad	WD bar	code	vrouwdeel	Ø mm	L mm	code	mandeel	Ø mm	L mm
0	1/8 BSP	500	o.a.	FFC02-02FBF 500 bar	25	48,6	o.a.	FFP02-02FBF 500 bar	13,6	43,5
1	1/4 BSP	400	o.a.	FFC04-04FBF 400 bar	28	58,5	o.a.	FFP04-04FBF 400 bar	16,2	52
2	3/8 BSP	350	90001654	FFC06-06FBF 350 bar	32	73,5	90001652	FFP06-06FBF 350 bar	19,8	60,5
2	3/8 BSP	350	90001658	FFC06-08FBF 350 bar	32	73,5	90001656	FFP06-08FBF 350 bar	19,8	60,5
3	1/2 BSP	350	90001661	FFC08-08FBF 350 bar	38	83,5	90001659	FFP08-08FBF 350 bar	24,6	72,5
3	3/4 BSP	350	90001662	FFC08-12FBF 350 bar	38	83,5	90001660	FFP08-12FBF 350 bar	24,6	74,5
4A	3/4 BSP	350	1001110	FFC10-12FBF 350 bar	42	86	1001109	FFP10-12FBF 350 bar	27	74
4	3/4 BSP	350	90001664	FFC12-12FBF 350 bar	48	94,5	1001224	FFP12-12FBF 350 bar	30	86
4	1 BSP	350	1001220	FFC12-16FBF 350 bar	48	97,5	1001221	FFP12-16FB 350 bar	30	86
5	1 BSP	350	1001329	FFC16-16FBF 350 bar	55	109,3	1001330	FFP16-16FBF 350 bar	36	90
8	2 BSP	250	o.a.	FFC32-32FBF 250 bar	103	147,4	o.a.	FFC32-32FBF 250 bar	72,9	173

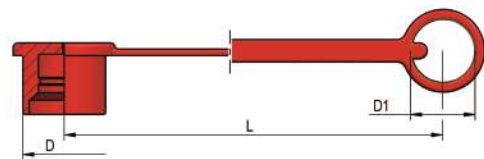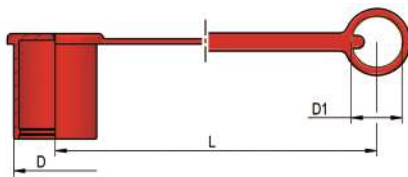

Stofkappen/pluggen

BG	code	stofplug	Ø mm	L mm	code	stofkap	Ø mm	L mm
1	90001592	FFC04-DP	32,5	200	90001591	FFP04-DC	26	200
2	90001600	FFC06-DP	37	200	90001595	FFP06-DC	27,5	200
3	90001610	FFC08-DP	43	200	90001605	FFP08-DC	35	200
4	90001614	FFC12-DP	53,5	265	90001612	FFP12-DC	43	265
5	90001616	FFC16-DP	63	280	90001618	FFP16-DC	50	280



Uitwisselbaar met: DNP PLT4, Faster 2FFI, Aeroquip FD89, Parker FEM, Snaptite 74, Inteva 131, Ceijn X65

FLAT FACED



Norm: ISO 16028 / 700 BAR
Materiaal: staal
Finish: Zn-Fe (CR 3)
Standaard Seals: NBR
Temperatuur bereik: -25°C + 100°C
Optionele seals: FKM, FFKM, EPDM, etc
Werkdruk: 700 bar
Onderdruk koppelen: nee

BG	draad	WD bar	code	vrouwdeel	Ø mm	L mm	code	mandeel	Ø mm	L mm
1	1/4 NPT	700	90001860	HFFC04-04 FNF 700 bar	28	58,5	90001862	HFFP04-04 FNF 700 bar	16,2	53,5
2	3/8 NPT	700	90001633	HFFC06-06 FNF 700 bar	32	73,5	90001634	HFFP06-06 FNF 700 bar	19,76	63,5

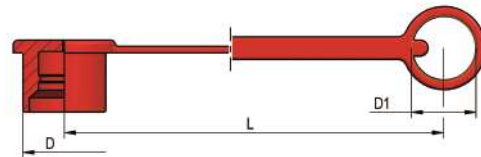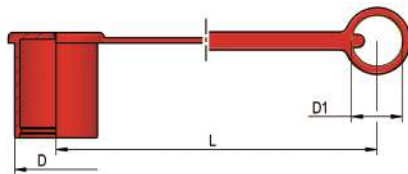

Stofkappen/pluggen

BG	code	stofplug	Ø mm	L mm	code	stofkap	Ø mm	L mm
1	90001592	FFC04-DP	32,5	200	90001591	FFP04-DC	26	200
2	90001600	FFC06-DP	37	200	90001595	FFP06-DC	27,5	200

Ook leverbaar met: BSP & UNF draad

Uitwisselbaar met: DNP PLT6